



F Series

Clay Treaters

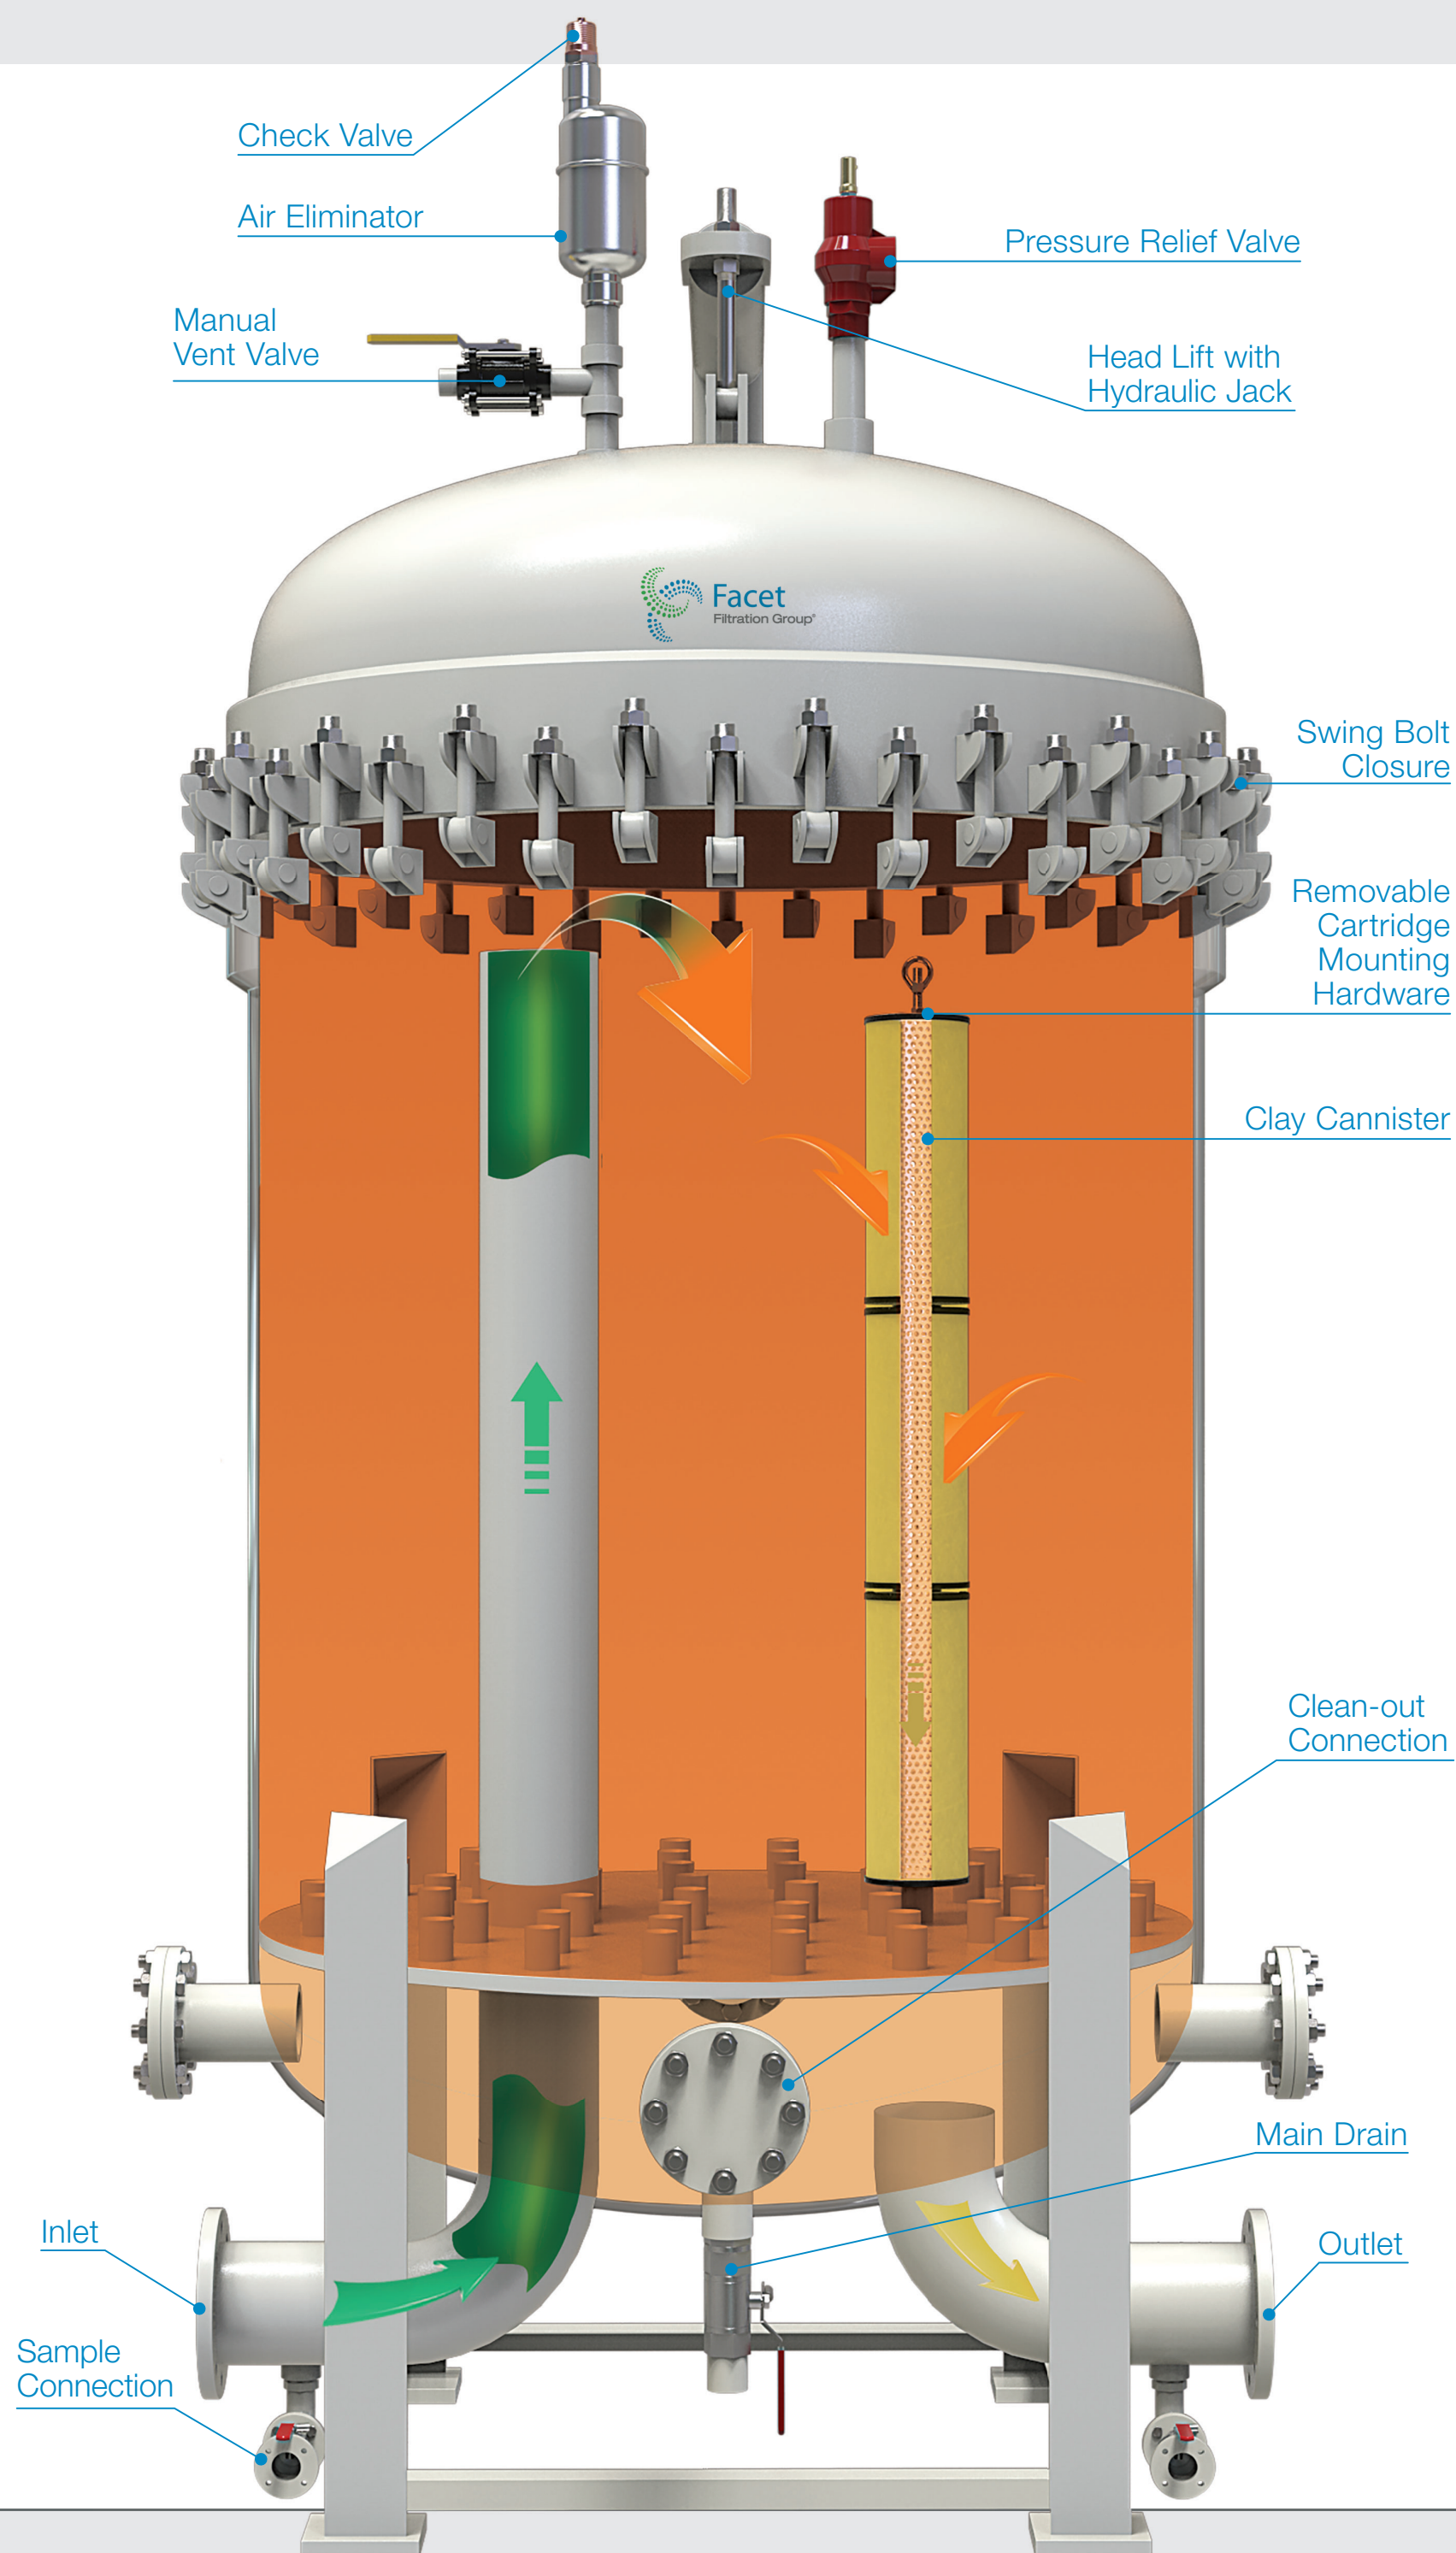

Cartridge Hoist (optional)

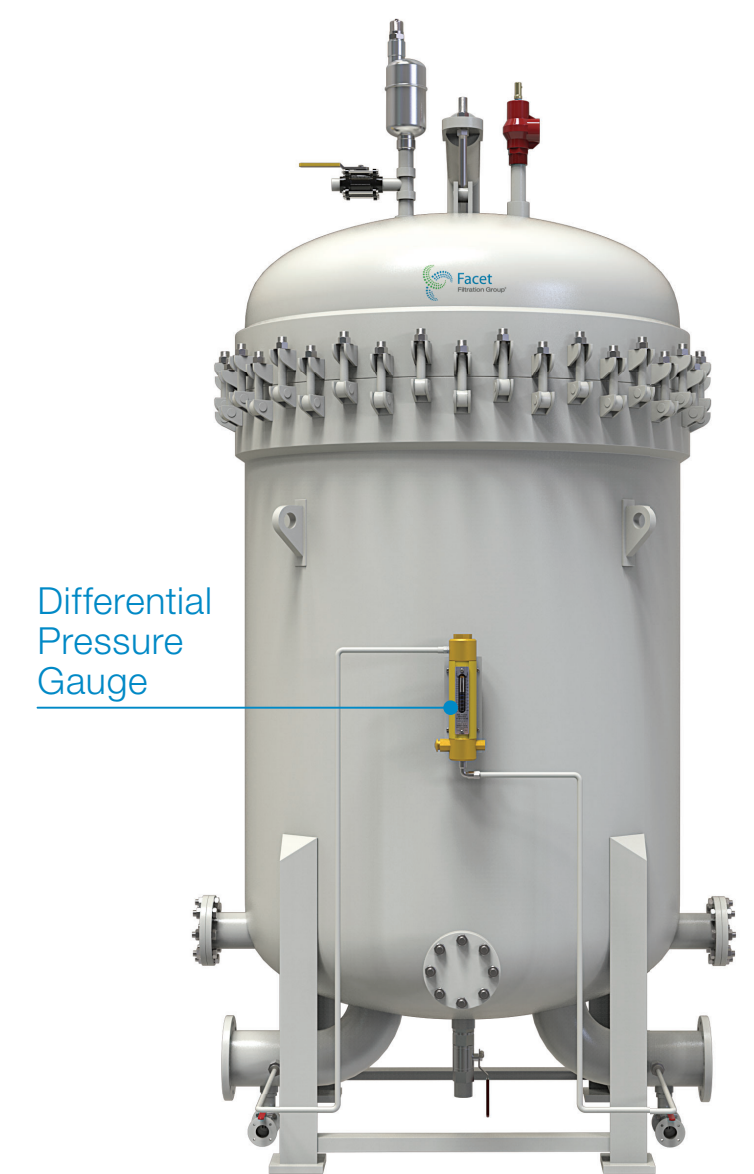

Differential Pressure Gauge



Facet Bag & Canister Cartridges



Clay treaters are usually placed upstream of coalescer separators to remove surface active agents (surfactants), color and additives from jet fuel.

Clay treatment removes the surfactant compounds, color and additives by adsorption and delivers treated fuel to the coalescer separator while prolonging the life of the coalescer cartridges.

Facet clay treaters will continuously adsorb surfactants, color and additives from jet fuel when used with Facet replaceable clay elements.