


Lube & Hydraulic Oil Filtration 981 Series Particulate Removal Vessels

In-line Filter Housing

The Model 981 delivers dependable filtration performance in a reduced footprint, helping extend equipment life and reduce the risk of oil-related failures and unplanned maintenance.

- **High-Performance Filtration:** Designed for reliable, high-pressure inline filtration in hydraulic and lube oil systems, supporting flows up to 20 gpm and pressures up to 1,200 psig
- **Compact & Rugged:** Ideal for mobile equipment, small hydraulic power units, and lube systems where larger assemblies aren't practical
- **Superior Protection:** Offers a more robust and durable alternative to spin-on filters, providing enhanced protection for critical components
- **Flexible Filtration:** Accommodates 4-inch filter elements with multiple micron ratings for tailored particulate removal

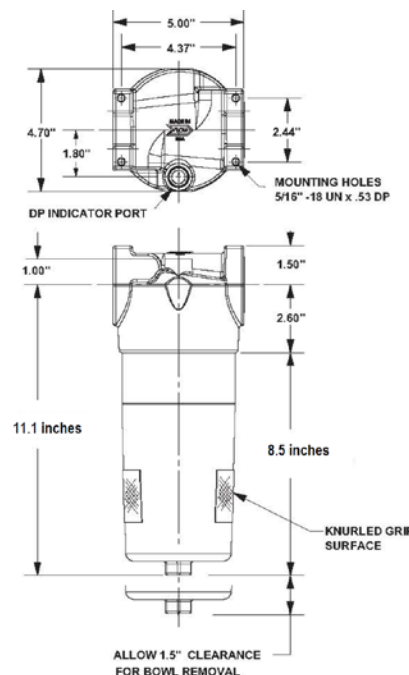

Specifications

Flows Up To	40 GPM / 152 lpm
Inlet / Outlet Connections	1½" NPTF
Seal Material and Type	Fluoroelastomer Circumferential Bowl Seal
Materials of Construction	Head: Die Cast Aluminum Bowl: Anodized Die Caste Aluminum By-Pass Valve: Nylon Filtration Element: Tin coated carbon steel end caps and center tube. Epoxy adhesives and inert micro-fiberglass filtration media
Fluid Compatibility	Petroleum Based Fluids (maximum viscosity = ISO 320)
Max. Operation Pressure / Static Burst Pressure	1,200 psig (83 bar) / 3,000 psig (206 bar)
Rated Fatigue Pressure	0-1000-0 psig for 1,000,000 cycles
Application	Inline Oil Filtration or Return Line Oil Filtration (maximum viscosity = ISO 320)
Recommended Change-Out Differential Pressure	25 psid (1.7 bar)
Differential Pressure Indicator Type and Setting Type	Visual — mechanical "pop-up" type indicator with Fluoroelastomer seal. Setting = 44 psid
By-Pass Valve Rating	50 psid (3.4 bar)
Operating Temperature Range	-15 °F to 250 °F (-26 °C to 120 °C)
Replacement Filtration Elements	8 inch (204 mm) length elements
Replacement Filtration Element Ratings	βx= 200: 1, 3, 6, 12, or 25 μm / βx(c) = 1000: 3, 5, 7, 12, 22 μm
Assembly Weight	8.8 pounds (4 kg)
Seal Kit	Part Number 981-SEAKKIT (includes o-ring bowl seal)

DONALDSON COMPANY, INC.

IMPORTANT NOTICE: Many factors beyond the control of Donaldson can affect the use, performance, or results of Donaldson products or services in a particular application, including the conditions impacting how the products or services are selected, used, installed, or maintained. Because these factors are uniquely within the user's knowledge and control, it is essential the user evaluate both the products and any related services to determine their suitability for the user's intended purpose and application, including fitness for the particular purpose. All products, services, product specifications, availability and data are subject to change without notice and may vary by region or country.

© 2026 Donaldson Company, Inc. All rights reserved. Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.