


Lube & Hydraulic Oil Filtration KP Series Portable Systems

The KP Series sets the standard for industrial oil filtration, delivering continuous removal of harmful particulates and water to safeguard critical equipment and maximize uptime.

- **High-efficiency contaminant removal:** Efficiently eliminates particulates and water from lube and hydraulic oils, reducing the risk of equipment wear and unplanned maintenance
- **Continuous protection:** Designed for around-the-clock operation, supporting long-term reliability in demanding industrial environments
- **Versatile application:** Proven performance in steel and aluminum mills, paper mills, and other heavy industries where oil cleanliness is critical
- **Rapid oil conditioning:** Quickly restores oil quality during shutdowns, preparing systems for efficient and trouble-free startup
- **Customizable solutions:** Available with a range of options and configurations to meet specific operational requirements

The KP Series ensures your lubrication and hydraulic systems operate at peak performance—minimizing downtime, extending equipment life, and delivering confidence in every run.

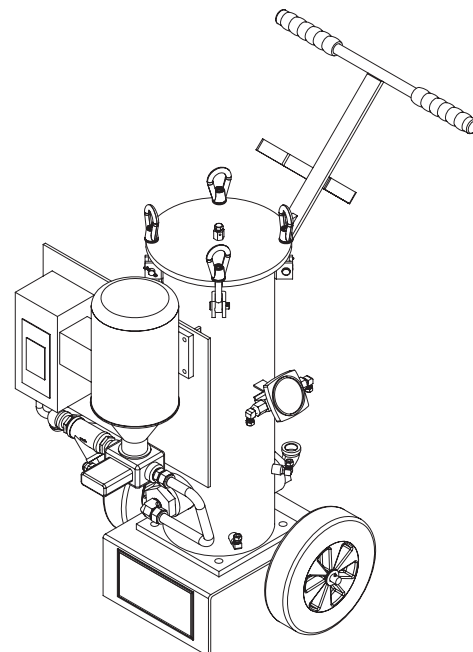

Specifications

Sizing	For use with reservoirs up to 600 gallons (2,270 liters)
System Pressure	100 psig / 7 bar
Environmental Parameters	NEMA 4 (moisture proof and dust proof) Minimum Temperature: 32 °F (0 °C) Maximum Temperature: 104 °F (40 °C)
Materials of Construction	Metals: Bronze, Carbon Steel, Stainless Steel Elastomers: Buna-N
Inlet/Outlet Connections	Inlet: 1" (25.4 mm) NPT Outlet: 1" (25.4 mm) NPT
Pump/Motor Assembly	Pump: positive displacement (sliding vane type) Motor: 1HP
Operating Voltage	120 VAC / 1PH / 60 Hz
Fluid Compatibility	Petroleum Based Fluids (maximum viscosity = ISO 320 at 100 °F)
Element Life Indicator	Type: Visual - Gauge Measurement: Differential Pressure Range: 0 - 40 psid
Recommended Change-Out DP	25 psid / 1.7 bar

	KP-618-5	KP-636-5	KP-636-10
System Flow (max.)	5 gpm (19 lpm)	5 gpm (19 lpm)	10 gpm (38 lpm)
Weight (Dry)	180 lbs (82 kg)	215 lbs (98 kg)	215 lbs (98 kg)
Dimensions (LxWxH)	30" x 24" x 36" (760 x 610 x 915 mm)	30" x 24" x 54" (760 x 610 x 1370 mm)	30" x 24" x 54" (760 x 610 x 1370 mm)

DONALDSON COMPANY, INC.

IMPORTANT NOTICE: Many factors beyond the control of Donaldson can affect the use, performance, or results of Donaldson products or services in a particular application, including the conditions impacting how the products or services are selected, used, installed, or maintained. Because these factors are uniquely within the user's knowledge and control, it is essential the user evaluate both the products and any related services to determine their suitability for the user's intended purpose and application, including fitness for the particular purpose. All products, services, product specifications, availability and data are subject to change without notice and may vary by region or country.

© 2026 Donaldson Company, Inc. All rights reserved. Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.