


A hydroelectric utility in the United States has partnered with Facet to supply governor oil and turbine oil filtration systems for both their large facilities and smaller facilities. The two systems in the photo shipped to a hydroelectric power plant for their guide and thrust bearing lube oil reservoirs.

Most of the KP10 systems ordered by this utility are used for their governor oil reservoirs.

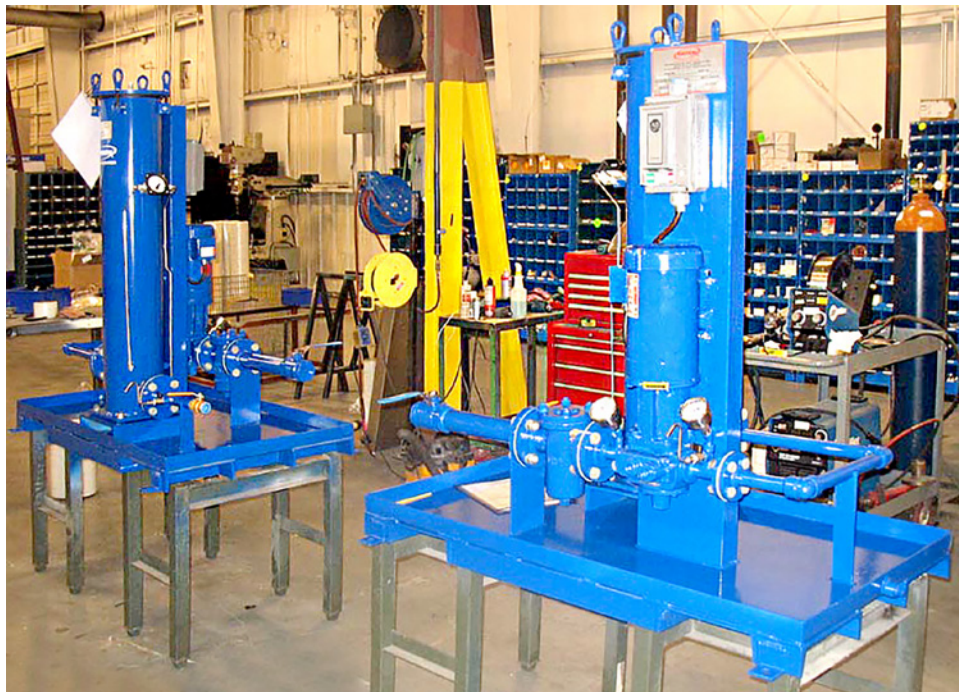

FEATURES AND BENEFITS

Longer Turbine Life

Using TURBO-TOC[™] will keep the oil system flushed and harmful contaminants removed. Oil reliability is increased.

Reduced Bearing Failure

When both water and particulate are brought down to acceptable levels, bearing failures will decrease or be eliminated.

Fewer Forced Outages

A continuous flow filtration system can quickly remove the contamination, thus preventing a forced outage.

Less-Costly Turbine Rebuilds

Clean turbine oil increases turbine dependability and helps in the reduction of repair costs that are directly associated with the contaminated oil.

DONALDSON COMPANY, INC.

IMPORTANT NOTICE: Many factors beyond the control of Donaldson can affect the use, performance, or results of Donaldson products or services in a particular application, including the conditions impacting how the products or services are selected, used, installed, or maintained. Because these factors are uniquely within the user's knowledge and control, it is essential the user evaluate both the products and any related services to determine their suitability for the user's intended purpose and application, including fitness for the particular purpose. All products, services, product specifications, availability and data are subject to change without notice and may vary by region or country.

© 2026 Donaldson Company, Inc. All rights reserved. Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.