


Fuel Filtration

REFINERY TO AIRCRAFT

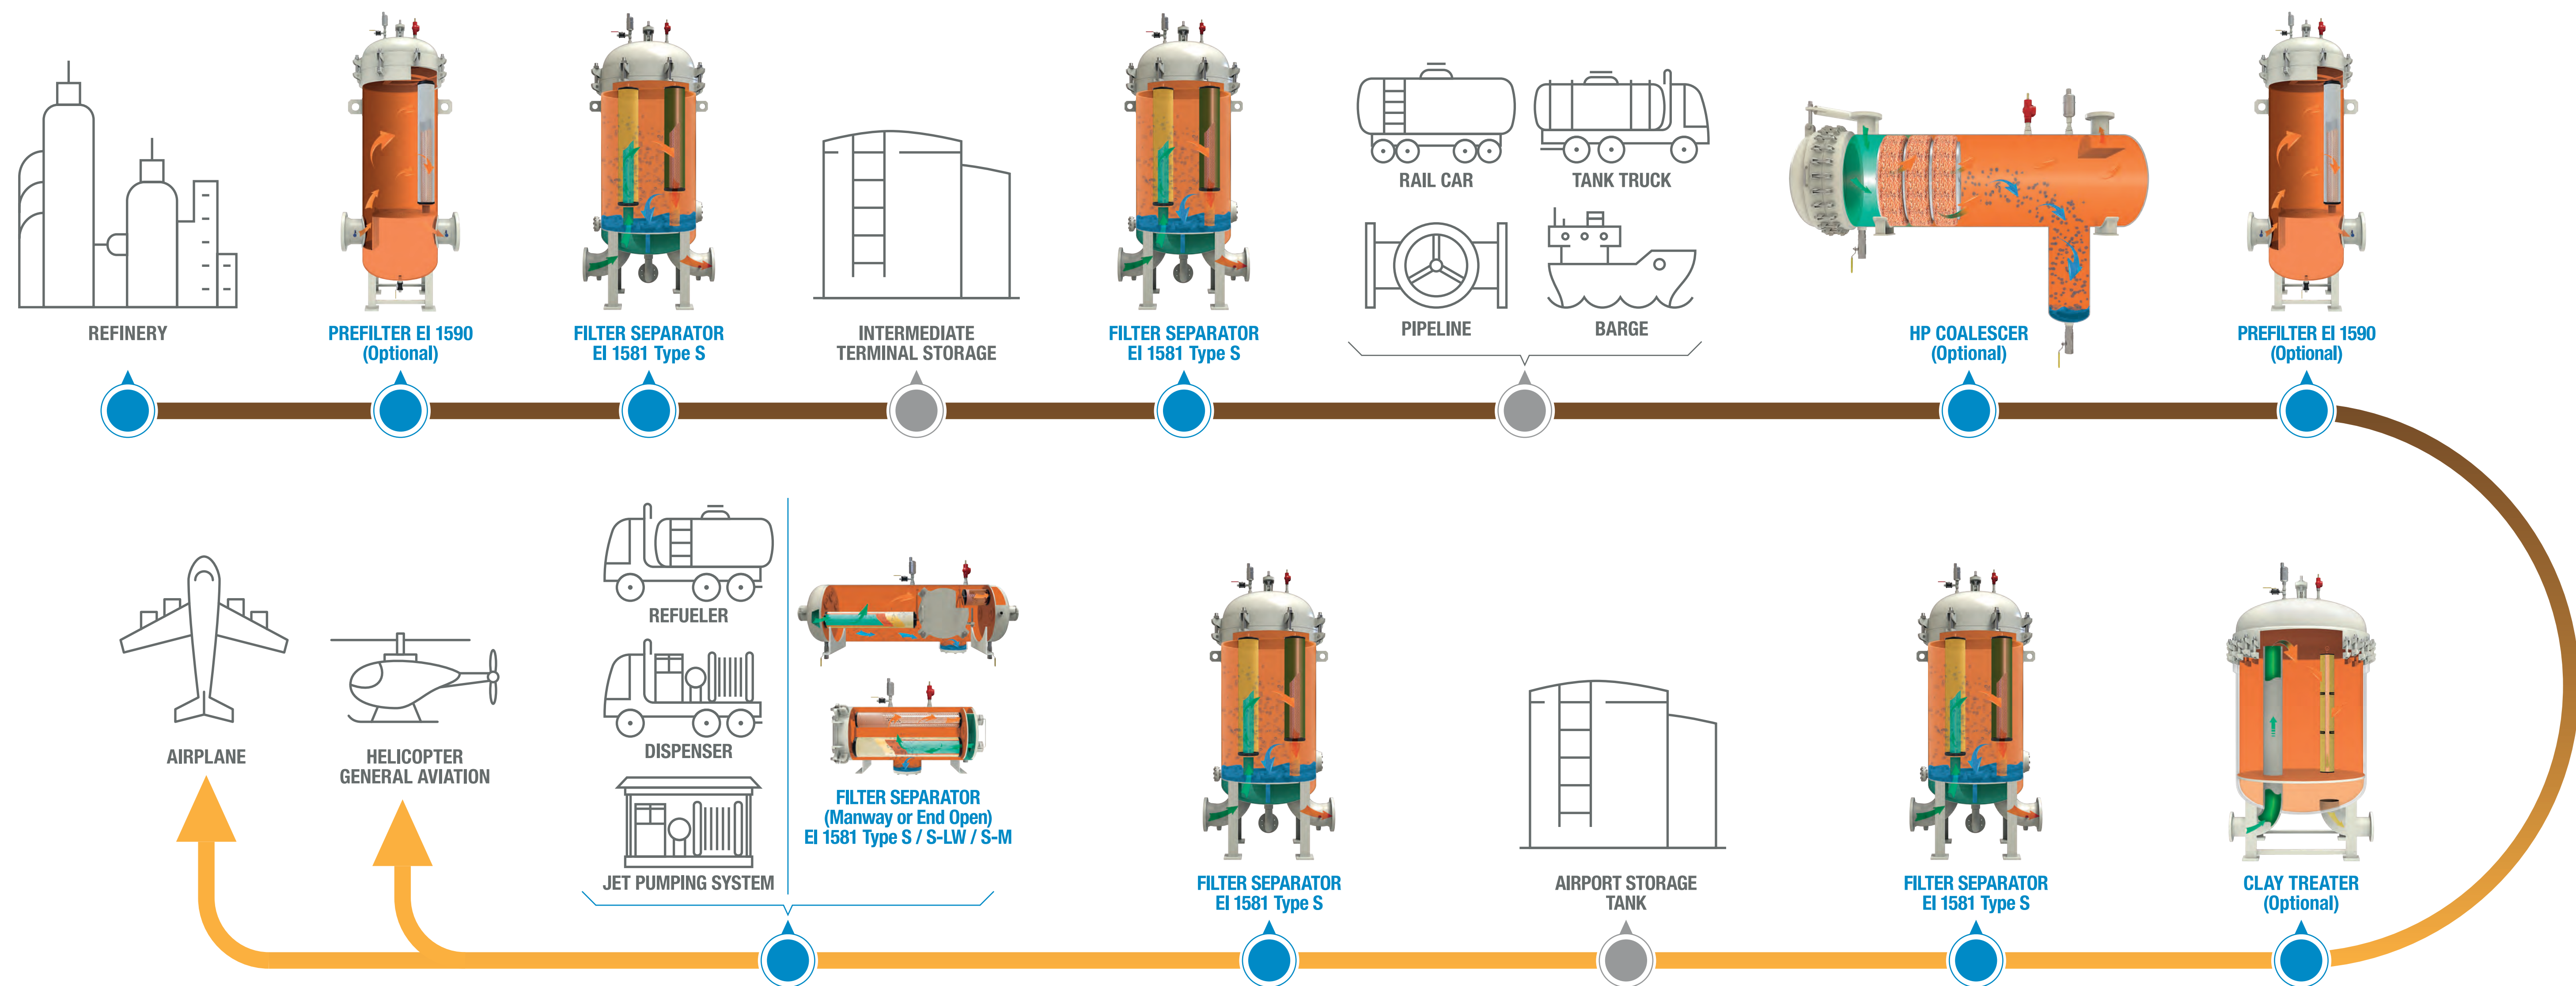

THREE EI1581 FWS CATEGORIES, DEFINED BY FUEL BEING USED

- Category "C" filter/separators are for use in commercial Jet-A or Jet-A1 fuel. They are tested in fuel containing Stadis 450 and DCI-4A.
- Category "M" filter/separators are for use in military JP-8, JP-5 or F-24 fuel. They are tested in fuel containing Stadis 450, DCI-4A and Di-EGME (FSII). Note: testing to Category "M" also qualifies for Category "C"
- Category "M100" filter/separators are for use in military JP-8+100 fuel. They are tested in fuel containing Stadis 450, DCI-4A, Di-EGME (FSII) and Spec Aid 8Q462.

THREE TYPE OF EI1581 FWS VESSELS, DEPENDING ON LOCATION USED

- Type "S" filter/separators are used at filtration points where significant levels of both dirt and water can be expected. Note: testing to Type "S" qualifies to Type "S-LD", Type "S-LW" and Type "S-M"
 - Type "S-LW" filter/separators are used for mobile equipment where minimal amounts of water can be expected
 - Type "S-M" filter/separators are used for mobile equipment where minimal amounts of dirt and water can be expected
- For Similarity Data Sheets and Compliance Certificates, be sure to specify vessel model number, type and quantity of elements used and maximum operating flow rate.